


RF Coaxial Loads / Terminations



Part Numbering

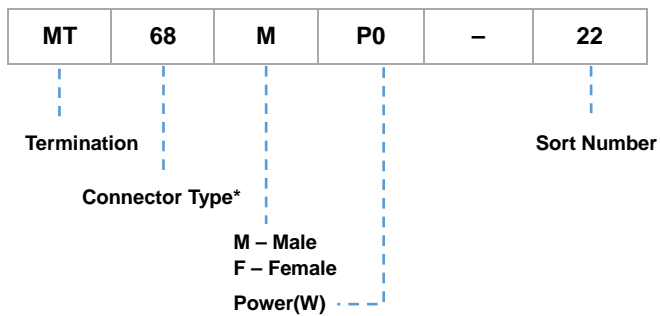

*Connector Type

2.4mm
2.92mm
SSMA
3.5mm
SMA
N
TNCA

RF Coaxial Loads / Terminations

2.4mm Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT68MP0	2.4mm	Male	0.5W	DC~40GHz	1.25:1(max)
MT68FP0	2.4mm	Female	0.5W	DC~40GHz	1.25:1(max)
MT68MP0-21	2.4mm	Male	0.5W	DC~50GHz	1.35:1(max)
MT68FP0-21	2.4mm	Female	0.5W	DC~50GHz	1.35:1(max)
MT68MP1	2.4mm	Male	1W	DC~40GHz	1.30:1(max)
MT68FP1	2.4mm	Female	1W	DC~40GHz	1.30:1(max)
MT68MP1-21	2.4mm	Male	1W	DC~50GHz	1.40:1(max)
MT68FP1-21	2.4mm	Female	1W	DC~50GHz	1.40:1(max)
2.92mm Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT67MP0	2.92mm	Male	0.5W	DC~40GHz	1.20:1(max)
MT67FP0	2.92mm	Female	0.5W	DC~40GHz	1.20:1(max)
MT67MP1	2.92mm	Male	1W	DC~40GHz	1.25:1(max)
MT67FP1	2.92mm	Female	1W	DC~40GHz	1.25:1(max)
SSMA Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT64MP1	SSMA	Male	1W	DC~40GHz	1.30:1(max)
3.5mm Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT66MP1	3.5mm	Male	1W	DC~26.5GHz	1.15:1(max)
MT66FP1	3.5mm	Female	1W	DC~26.5GHz	1.15:1(max)
MT66MP2	3.5mm	Male	2W	DC~26.5GHz	1.20:1(max)
MT66FP2	3.5mm	Female	2W	DC~26.5GHz	1.20:1(max)
SMA Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT69MP1	SMA	Male	1W	DC~26.5GHz	1.15:1(max)
MT69FP1	SMA	Female	1W	DC~26.5GHz	1.15:1(max)
MT69MP2	SMA	Male	2W	DC~26.5GHz	1.20:1(max)
MT69FP2	SMA	Female	2W	DC~26.5GHz	1.20:1(max)
N Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT65MP2	N	Male	2W	DC~18GHz	1.15:1(max)
MT65FP2	N	Female	2W	DC~18GHz	1.15:1(max)
TNCA Loads					
P/N	Connector	Gender	Average Power	Frequency	VSWR
MT33MP2	TNCA	Male	2W	DC~18GHz	1.25:1(max)